

Touch Panel Display D101

10.1-inch Industrial Touch Panel Display

RUGSTORM Touch Panel Series features 10.1-inch, 15.6-inch, and 21.5-inch industrial touch panels built for smooth performance and effortless integration. With a sleek design and responsive touchscreen, the touch panel drops seamlessly into control systems, automation lines, kiosks, and monitoring stations. Paired with RUGSTORM's quick and cost-effective customization services, the touch panel delivers a solution precisely tuned to your workflow and operational demands.



Extreme Temp. Resistance
Humidity Resistance



Capacitive Touch Panel
5-point Multi-touch



Sleek Stylish Design
Aluminium-alloy Frame



ESD Certified
Front Panel Protection



Seamless Connectivity
Comprehensive I/O Ports




Tailored Specifications
Customization Available

10.1-inch Industrial Touch Panel Display



RUGSTORM | Panel Display D101

Display	10.1-inch	Dimension	252mm (L) 171mm (W) 31.5mm (D)
	1280 x 800 resolution		0.88kg
	5-point capacitive touch screen	Power	Input : 12V
	Max Brightness: 350 cd/m2		Wireless Connectivity
	Contrast Ratio: 1000:1	4G LTE / 5G (optional)	
	Viewing Angel: 170°	Environmental Resistance	Operating Temperature : -10°C ~55°C
	Response Time : 30ms		Storage Temperature : -20°C ~ 60°C
	Backlight Light Life : 30,000h (Min)		Operating Humidity : 0%~95% (non-condensing)
	Active Area : 217.98 x 136.6mm		Front Panel Sealing : IP54 / IP65 (optional)
Display Color : 16.7M	Surface Hardness : 6H		
Interface	· DC Jack x 1	Compliance	JATE / TELEC / VCCI / CE DOC / UKCA / BIS
	· HDMI x 1		...
	· USB-B x 1		
	· RS485 x 1		

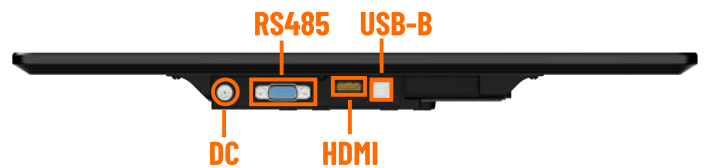

*RUGSTORM holds a wide range of certifications across multiple countries, For more information, please contact us at sales@rugstorm.com

*Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

RUGSTORM

Reliable Devices Built to Make Work Easier



China Office

NO.599 Gaojing Road, Shanghai, China



Netherlands Office

Baltesakker 17, Eindhoven, Netherlands



Japan Office

7-7-24 Shinjuku, Tokyo, Japan



After Sales

3-30-8 Higashi, Kunitachi, Japan



Website

www.rugstorm.com



E-mail

sales@rugstorm.com

Touch Panel Display D150

15.6-inch Industrial Touch Panel Display

RUGSTORM Touch Panel Series features 10.1-inch, 15.6-inch, and 21.5-inch industrial touch panels built for smooth performance and effortless integration. With a sleek design and responsive touchscreen, the touch panel drops seamlessly into control systems, automation lines, kiosks, and monitoring stations. Paired with RUGSTORM's quick and cost-effective customization services, the touch panel delivers a solution precisely tuned to your workflow and operational demands.



Extreme Temp. Resistance
Humidity Resistance



Capacitive Touch Panel
5-point Multi-touch



Sleek Stylish Design
Aluminium-alloy Frame



ESD Certified
Front Panel Protection



Seamless Connectivity
Comprehensive I/O Ports



Tailored Specifications
Customization Available

15.6-inch Industrial Touch Panel Display



China Office
NO.599 Gaojing Road, Shanghai, China



Japan Office
7-7-24 Shinjuku, Tokyo, Japan



Website
www.rugstorm.com



Netherland Office
Baltesakker 17, Eindhoven, Netherlands




After Sales
3-30-8 Higashi, Kunitachi, Japan



E-mail
sales@rugstorm.com

RUGSTORM | Panel Display D150

Display	15.6-inch	Dimension	384mm (L) 244mm (W) 32.5mm (D)
	1920 x 1080 resolution		1.66kg
	5-point capacitive touch screen	Power	Input : 12V
	Max Brightness: 300 cd/m2		Wireless Connectivity
	Contrast Ratio: 1200:1	4G LTE / 5G (optional)	
	Viewing Angel: 170°	Environmental Resistance	Operating Temperature : -10°C ~55°C
	Response Time : 30ms		Storage Temperature : -20°C ~ 60°C
	Backlight Light Life : 30,000h (Min)		Operating Humidity : 0%~95% (non-condensing)
	Active Area : 344.16 x 193.59mm		Front Panel Sealing : IP54 / IP65 (optional)
Display Color : 16.7M	Surface Hardness : 6H		
Interface	· DC Jack x 1	Compliance	JATE / TELEC / VCCI / CE DOC / UKCA / BIS
	· HDMI x 1		...
	· USB-B x 1		
	· RS485 x 1		

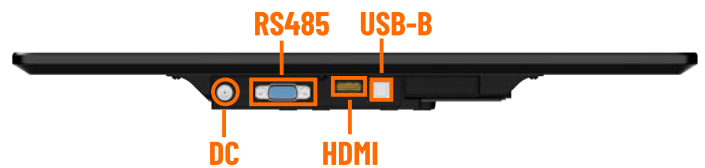

*RUGSTORM holds a wide range of certifications across multiple countries, For more information, please contact us at sales@rugstorm.com

*Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

RUGSTORM

Reliable Devices Built to Make Work Easier



China Office

NO.599 Gaojing Road, Shanghai, China



Netherlands Office

Baltesakker 17, Eindhoven, Netherlands



Japan Office

7-7-24 Shinjuku, Tokyo, Japan



After Sales

3-30-8 Higashi, Kunitachi, Japan



Website

www.rugstorm.com



E-mail

sales@rugstorm.com

Touch Panel Display D215

21.5-inch Industrial Touch Panel Display

RUGSTORM Touch Panel Series features 10.1-inch, 15.6-inch, and 21.5-inch industrial touch panels built for smooth performance and effortless integration. With a sleek design and responsive touchscreen, the touch panel drops seamlessly into control systems, automation lines, kiosks, and monitoring stations. Paired with RUGSTORM's quick and cost-effective customization services, the touch panel delivers a solution precisely tuned to your workflow and operational demands.



Extreme Temp. Resistance
Humidity Resistance



Capacitive Touch Panel
5-point Multi-touch



Sleek Stylish Design
Aluminium-alloy Frame



ESD Certified
Front Panel Protection



Seamless Connectivity
Comprehensive I/O Ports



Tailored Specifications
Customization Available

21.5-inch Industrial Touch Panel Display



China Office
NO.599 Gaojing Road, Shanghai, China



Netherlands Office
Baltesakker 17, Eindhoven, Netherlands



Japan Office
7-7-24 Shinjuku, Tokyo, Japan



After Sales
3-30-8 Higashi, Kunitachi, Japan




Website
www.rugstorm.com



E-mail
sales@rugstorm.com

RUGSTORM | Panel Display D215

Display	21.5-inch	Dimension	532mm (L) 325mm (W) 39mm (D)
	1920 x 1080 resolution		1.66kg
	5-point capacitive touch screen	Power	Input : 12V
	Max Brightness: 300 cd/m2		Wireless Connectivity
	Contrast Ratio: 1500:1	4G LTE / 5G (optional)	
	Viewing Angel: 170°	Environmental Resistance	Operating Temperature : -10°C ~55°C
	Response Time : 30ms		Storage Temperature : -20°C ~ 60°C
	Backlight Light Life : 30,000h (Min)		Operating Humidity : 0%~95% (non-condensing)
	Active Area : 476.64 x 268.11mm		Front Panel Sealing : IP54 / IP65 (optional)
Display Color : 16.7M	Surface Hardness : 6H		
Interface	· DC Jack x 1	Compliance	JATE / TELEC / VCCI / CE DOC / UKCA / BIS
	· HDMI x 1		...
	· USB-B x 1		
	· RS485 x 1		

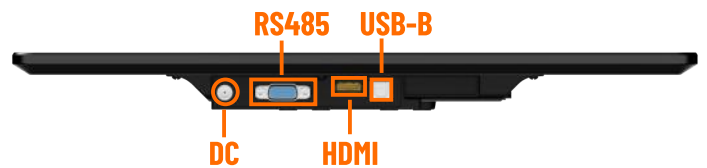

*RUGSTORM holds a wide range of certifications across multiple countries, For more information, please contact us at sales@rugstorm.com

*Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

RUGSTORM

Reliable Devices Built to Make Work Easier



China Office
NO.599 Gaojing Road, Shanghai, China



Netherlands Office
Baltesakker 17, Eindhoven, Netherlands



Japan Office
7-7-24 Shinjuku, Tokyo, Japan



After Sales
3-30-8 Higashi, Kunitachi, Japan



Website
www.rugstorm.com



E-mail
sales@rugstorm.com

タッチパネル D101

10.1-inch Industrial Touch Panel Display

RUGSTORM タッチパネル シリーズは、スムーズな動作と容易なシステム統合を追求した、10.1インチ、15.6インチ、21.5インチの産業用ディスプレイです。洗練されたデザインと高レスポンスなタッチスクリーンを備え、制御システム、自動化ライン、キオスク端末、監視ステーションなどへ違和感なく組み込めます。迅速かつ低コストなカスタマイズにより、現場の運用要件に精緻にチューニングされたソリューションを実現します。



10.1



優れた耐温性
過酷な湿度に対応



静電容量式タッチパネル
5点マルチタッチ



洗練された意匠
堅牢なアルミ筐体



ESD認証済
前面保護パネル設計



安定した接続性
豊富な拡張ポート




仕様の最適化
柔軟なカスタマイズ

10.1-inch Industrial Touch Panel Display



ディスプレイ	10.1インチ	外形仕様	252mm (長さ) 171mm (幅) 31.5mm (厚さ)	
	1280 × 800 解像度		0.88kg	
	静電容量式 5点タッチパネル対応		電源	入力電圧：12V
	最大輝度 350 cd/m2			無線接続
	コントラスト比: 1000:1		4G LTE / 5G (オプション)	
	視角: 170°		使用環境	動作温度：-10°C ~55°C
	応答速度 (タイプ)：30ms			保存温度：-20°C ~ 60°C
	バックライトの最低寿命：30,000時間			使用湿度：0%~95% (結露なきこと)
アクティブエリア：217.98 x 136.6mm	前面防塵・防滴仕様：IP54 / IP65 (オプション)			
色深度：16.7M	適応規格	表面硬度：6H		
インターフェース		・ DC Jack x 1	CE / PSE / FCC / UKCA / BIS / KC	
	・ HDMI x 1	Rugstormは複数の国で認証を提供しています。		
	・ USB-B x 1	詳細については、sales@rugstorm.comまでお		
	・ RS485 x 1	問い合わせください。		

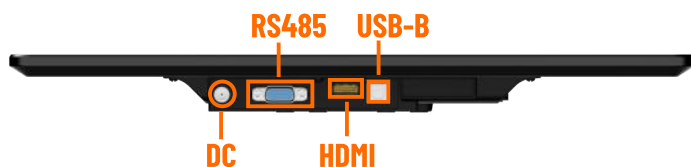

*製品の仕様は予告なく変更することがあります。最新版は公式サイト (www.rugstorm.com) または sales@rugstorm.com にてご確認ください。
 *Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

タッチパネル D150

15.6-inch Industrial Touch Panel Display

RUGSTORM タッチパネル シリーズは、スムーズな動作と容易なシステム統合を追求した、10.1インチ、15.6インチ、21.5インチの産業用ディスプレイです。洗練されたデザインと高レスポンスなタッチスクリーンを備え、制御システム、自動化ライン、キオスク端末、監視ステーションなどへ違和感なく組み込めます。迅速かつ低コストなカスタマイズにより、現場の運用要件に精緻にチューニングされたソリューションを実現します。



15.6



優れた耐温性
過酷な湿度に対応



静電容量式タッチパネル
5点マルチタッチ



洗練された意匠
堅牢なアルミ筐体



ESD認証済
前面保護パネル設計



安定した接続性
豊富な拡張ポート




仕様の最適化
柔軟なカスタマイズ

15.6-inch Industrial Touch Panel Display



ディスプレイ	15.6インチ	外形仕様	384mm (長さ) 244mm (幅) 32.5mm (厚さ)
	1920 x 1080 解像度		1.66kg
	静電容量式 5点タッチパネル対応	電源	入力電圧: 12V
	最大輝度 300 cd/m2		無線接続
	コントラスト比: 1200:1	使用環境	4G LTE / 5G (オプション)
	視角: 170°		動作温度: -10°C ~ 55°C
	応答速度 (タイプ): 30ms		保存温度: -20°C ~ 60°C
	バックライトの最低寿命: 30,000時間		使用湿度: 0%~95% (結露なきこと)
アクティブエリア: 344.16 x 193.59mm	前面防塵・防滴仕様: IP54 / IP65 (オプション)		
色深度: 16.7M	表面硬度: 6H		
インターフェース	・ DC Jack x 1	適応規格	CE / PSE / FCC / UKCA / BIS / KC
	・ HDMI x 1		Rugstormは複数の国で認証を提供しています。
	・ USB-B x 1		詳細については、sales@rugstorm.comまでお
	・ RS485 x 1		問い合わせください。

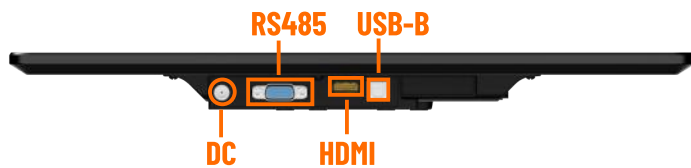

*製品の仕様は予告なく変更することがあります。最新版は公式サイト (www.rugstorm.com) または sales@rugstorm.com にてご確認ください。
 *Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

タッチパネル D215

21.5-inch Industrial Touch Panel Display

RUGSTORM タッチパネル シリーズは、スムーズな動作と容易なシステム統合を追求した、10.1インチ、15.6インチ、21.5インチの産業用ディスプレイです。洗練されたデザインと高レスポンスなタッチスクリーンを備え、制御システム、自動化ライン、キオスク端末、監視ステーションなどへ違和感なく組み込めます。迅速かつ低コストなカスタマイズにより、現場の運用要件に精緻にチューニングされたソリューションを実現します。



21.5



優れた耐温性
過酷な湿度に対応



静電容量式タッチパネル
5点マルチタッチ



洗練された意匠
堅牢なアルミ筐体



ESD認証済
前面保護パネル設計



安定した接続性
豊富な拡張ポート




仕様の最適化
柔軟なカスタマイズ

21.5-inch Industrial Touch Panel Display



ディスプレイ	21.5インチ	外形仕様	532mm (長さ) 325mm (幅) 39mm (厚さ)
	1920 x 1080 解像度		1.66kg
	静電容量式 5点タッチパネル対応	電源	入力電圧: 12V
	最大輝度 300 cd/m2		無線接続
	コントラスト比: 1500:1	使用環境	4G LTE / 5G (オプション)
	視角: 170°		動作温度: -10°C ~ 55°C
	応答速度 (タイプ): 30ms		保存温度: -20°C ~ 60°C
	バックライトの最低寿命: 30,000時間		使用湿度: 0%~95% (結露なきこと)
アクティブエリア: 476.64 x 268.11mm	前面防塵・防滴仕様: IP54 / IP65 (オプション)		
色深度: 16.7M	表面硬度: 6H		
インターフェース	・ DC Jack x 1	適応規格	CE / PSE / FCC / UKCA / BIS / KC
	・ HDMI x 1		Rugstormは複数の国で認証を提供しています。
	・ USB-B x 1		詳細については、sales@rugstorm.comまでお
	・ RS485 x 1		問い合わせください。

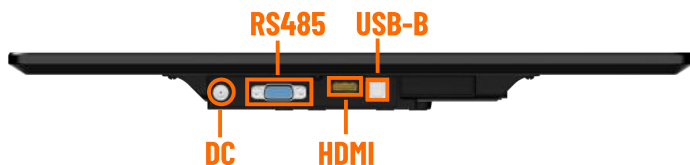

*製品の仕様は予告なく変更することがあります。最新版は公式サイト (www.rugstorm.com) または sales@rugstorm.com にてご確認ください。
 *Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com