



OS	Windows® 10 LTSC / Windows® 11	Memory	4GB DDR4 / 16GB
CPU	Intel® N100, 3.4 GHz (Max)	Storage	128GB / 256GB / 512GB / 1TB
Display	10.1-inch 1280 x 800 resolution	Dimension	252mm (L) 171mm (W) 49.5mm (D)
	5-point capacitive touch screen		1.6kg
	Max Brightness: 300 cd/m2	Power	Input : 12V
	Contrast Ratio: 1000:1	Wireless Connectivity	Wi-Fi 2.4GHz & 5GHz (optional)
	Viewing Angel: 170°		Bluetooth® v5.4 (optional)
	Response Time : 30ms	Environmental Resistance	Operating Temperature : -10°C ~55°C
Interface	Backlight Light Life : 30,000h		Storage Temperature : -20°C ~ 60°C
	· USB-C x 1		Operating Humidity : 5% ~95% (non-condensing)
	· USB 3.0 x 4		Front Panel Sealing : IP54 / IP65 (optional)
	· USB 2.0 x 2		Surface Hardness : 6H
	· DB9 RS-232 x 2	Compliance	This product meets major global standards and holds relevant certifications.
	· HDMI x 1		For details, please email sales@rugstorm.com.
	· DP + HDMI x 1		
	· RJ45 x 2		
	· 5.5mm DC_IN x 1		
	· 3.5mm Audio x 1		



*RUGSTORM holds a wide range of certifications across multiple countries, For more information, please contact us at sales@rugstorm.com
 *Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

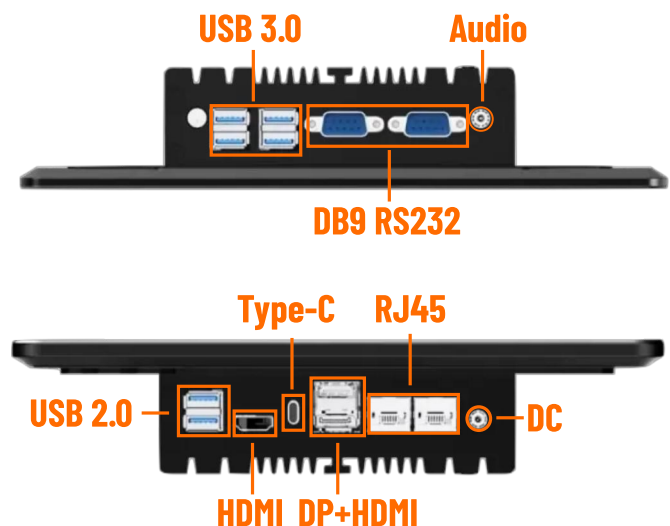


OS	Windows® 10 LTSC / Windows® 11	Memory	4GB DDR4 / 16GB
CPU	Intel® N100, 3.4 GHz (Max)	Storage	128GB / 256GB / 512GB / 1TB
Display	15.6-inch	Dimension	384.2mm (L) 244mm (W) 50.5mm (D)
	1920 x 1080 resolution		2.4kg
	5-point capacitive touch screen	Power	Input : 12V
	Max Brightness: 300 cd/m2	Wireless Connectivity	Wi-Fi 2.4GHz & 5GHz (optional)
	Contrast Ratio: 1000:1		Bluetooth® v5.4 (optional)
	Viewing Angel: 170°	Environmental Resistance	Operating Temperature : -10°C ~55°C
	Response Time : 30ms		Storage Temperature : -20°C ~ 60°C
	Backlight Light Life : 30,000h		Operating Humidity : 5%~95% (non-condensing)
Interface	· USB-C x 1 · USB 3.0 x 4 · USB 2.0 x 2 · DB9 RS-232 x 2 · HDMI x 1 · DP + HDMI x 1 · RJ45 x 2 · 5.5mm DC_IN x 1 · 3.5mm Audio x 1		Front Panel Sealing : IP54 / IP65 (optional)
			Surface Hardness : 6H
		Compliance	This product meets major global standards and holds relevant certifications. For details, please email sales@rugstorm.com.

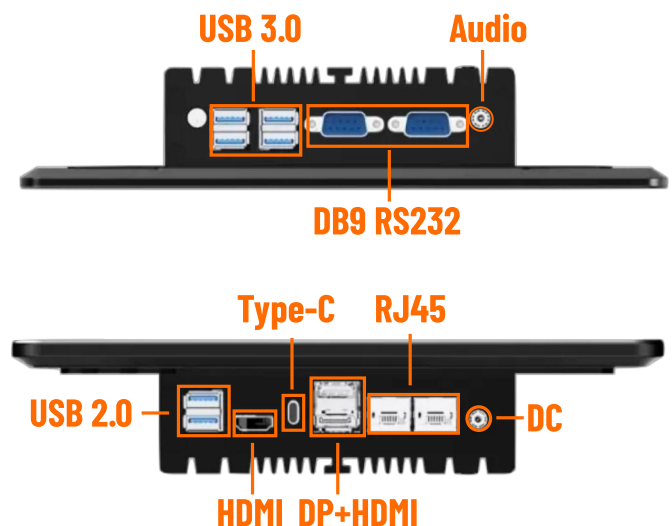

*RUGSTORM holds a wide range of certifications across multiple countries, For more information, please contact us at sales@rugstorm.com
 *Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com



OS	Windows® 10 LTSC / Windows® 11	Memory	4GB DDR4 / 16GB
CPU	Intel® N100, 3.4 GHz (Max)	Storage	128GB / 256GB / 512GB / 1TB
Display	21.5-inch	Dimension	546mm (L) 342mm (W) 57mm (D)
	1920 x 1080 resolution		5.3kg
	10-point capacitive touch screen	Power	Input : 12V
	Max Brightness: 350 cd/m2	Wireless Connectivity	Wi-Fi 2.4GHz & 5GHz (optional)
	Contrast Ratio: 1000:1		Bluetooth® v5.4 (optional)
	Viewing Angel: 178°	Environmental Resistance	Operating Temperature : -10°C ~55°C
Interface	Response Time : 30ms		Storage Temperature : -20°C ~ 60°C
	Backlight Light Life : 30,000h		Operating Humidity : 5%~95% (non-condensing)
	· USB-C x 1		Front Panel Sealing : IP54 / IP65 (optional)
	· USB 3.0 x 4	Compliance	Surface Hardness : 6H
	· USB 2.0 x 2		This product meets major global standards and holds relevant certifications.
	· DB9 RS-232 x 2		For details, please email sales@rugstorm.com.
	· HDMI x 1		
	· DP + HDMI x 1		
	· RJ45 x 2		
	· 5.5mm DC_IN x 1		
	· 3.5mm Audio x 1		

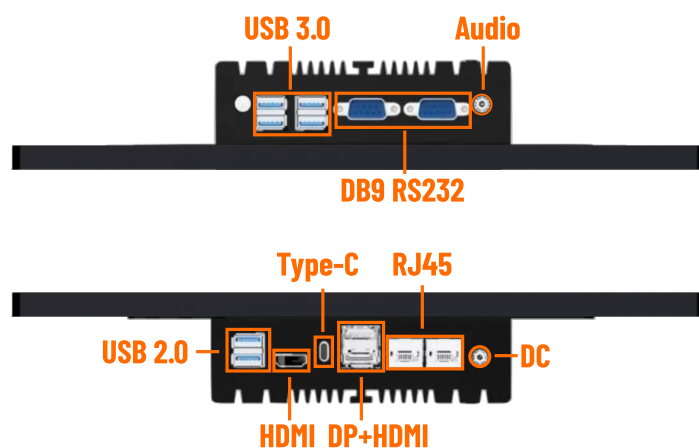

*RUGSTORM holds a wide range of certifications across multiple countries, For more information, please contact us at sales@rugstorm.com


*Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com



RUGSTORM



OS	Windows® 10 LTSC / Windows® 11	メモリ	4GB DDR4 / 16GB
CPU	Intel® N100, 3.4GHz (Max)	ストレージ	128GB / 256GB / 512GB / 1TB
ディスプレイ	10.1インチ	外形仕様	252mm (L) 171mm (W) 49.5mm (D)
	1280 × 800 解像度		1.6kg
	静電容量式 5点タッチパネル対応	電源	入力電圧：12V
	最大輝度 350 cd/m2	無線接続	Wi-Fi 2.4GHz & 5GHz 対応 (オプション)
	コントラスト比: 1000:1		Bluetooth® v5.4 (オプション)
	視角: 170°	使用環境	動作温度：-10℃ ~55℃
	応答速度 (タイプ)：30ms		保存温度：-20℃ ~ 60℃
バックライト：30,000時間	使用湿度：5%~95% (結露なきこと)		
インターフェース	・ USB-C x 1		前面防塵・防滴仕様：IP54 / IP65 (オプション)
	・ USB 3.0 x 4	表面硬度：6H	
	・ USB 2.0 x 2	適応規格	本製品は、世界各国の主要な規格・認証に準拠しています。詳細は sales@rugstorm.com までお問い合わせください。
	・ DB9 RS-232 x 2		
	・ HDMI x 1		
	・ DP + HDMI x 1		
	・ RJ45 x 2		
・ 5.5mm DC_IN x 1			
・ 3.5mm Audio x 1			

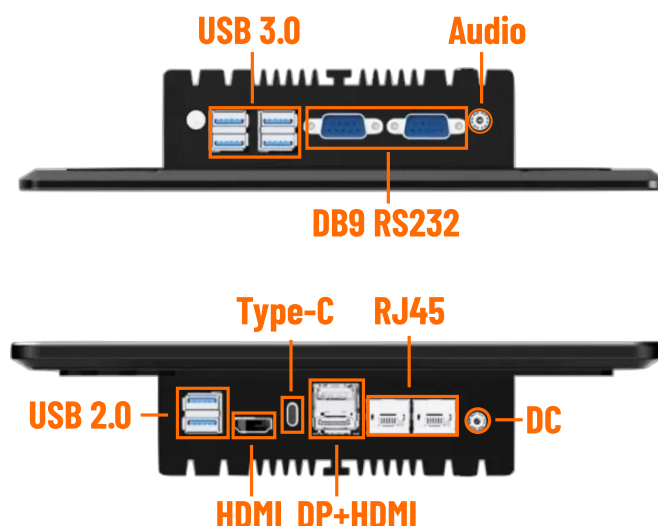


RUGSTORM

*製品の仕様は予告なく変更することがあります。最新版は公式サイト (www.rugstorm.com) または sales@rugstorm.com にてご確認ください。

*Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

OS	Windows® 10 LTSC / Windows® 11	メモリ	4GB DDR4 / 16GB
CPU	Intel® N100, 3.4GHz (Max)	ストレージ	128GB / 256GB / 512GB / 1TB
ディスプレイ	15.6インチ	外形仕様	384.2mm (L) 244mm (W) 50.5mm (D)
	1920 × 1080 解像度		2.4kg
	静電容量式 5点タッチパネル対応	電源	入力電圧：12V
	最大輝度 300 cd/m2	無線接続	Wi-Fi 2.4GHz & 5GHz 対応 (オプション)
	コントラスト比: 1000:1		Bluetooth® v5.4 (オプション)
	視角: 170°	使用環境	動作温度：-10℃ ~55℃
	応答速度 (タイプ)：30ms		保存温度：-20℃ ~ 60℃
バックライト：30,000時間	使用湿度：5%~95% (結露なきこと)		
インターフェース	・ USB-C x 1		前面防塵・防滴仕様：IP54 / IP65 (オプション)
	・ USB 3.0 x 4	表面硬度：6H	
	・ USB 2.0 x 2	適応規格	本製品は、世界各国の主要な規格・認証に準拠しています。詳細は sales@rugstorm.com までお問い合わせください。
	・ DB9 RS-232 x 2		
	・ HDMI x 1		
	・ DP + HDMI x 1		
	・ RJ45 x 2		
・ 5.5mm DC_IN x 1			
・ 3.5mm Audio x 1			

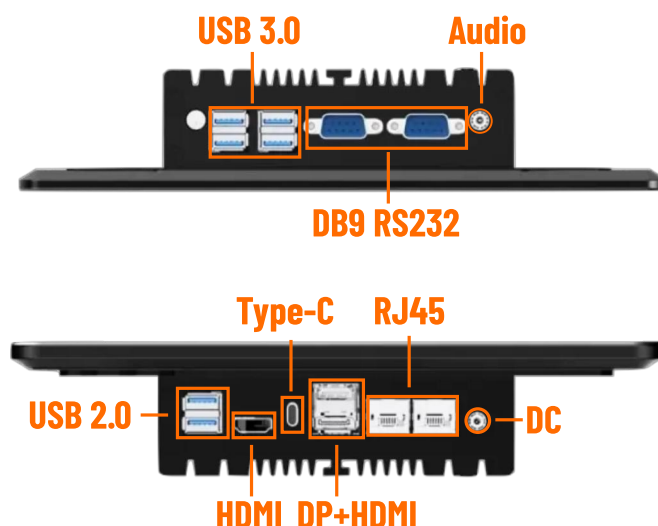


RUGSTORM

*製品の仕様は予告なく変更することがあります。最新版は公式サイト (www.rugstorm.com) または sales@rugstorm.com にてご確認ください。

*Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

OS	Windows® 10 LTSC / Windows® 11	メモリ	4GB DDR4 / 16GB
CPU	Intel® N100, 3.4GHz (Max)	ストレージ	128GB / 256GB / 512GB / 1TB
ディスプレイ	21.5インチ	外形仕様	546mm (L) 342mm (W) 57mm (D)
	1920 × 1080 解像度		5.5kg
	静電容量式 10点タッチパネル対応	電源	入力電圧：12V
	最大輝度 350 cd/m2	無線接続	Wi-Fi 2.4GHz & 5GHz 対応 (オプション)
	コントラスト比: 1000:1		Bluetooth® v5.4 (オプション)
	視角: 170°	使用環境	動作温度: -10°C ~ 55°C
インターフェース	応答速度 (タイプ) : 30ms		保存温度: -20°C ~ 60°C
	バックライト: 30,000時間		使用湿度: 5% ~ 95% (結露なきこと)
	・ USB-C x 1		前面防塵・防滴仕様: IP54 / IP65 (オプション)
	・ USB 3.0 x 4	適応規格	表面硬度: 6H
	・ USB 2.0 x 2		本製品は、世界各国の主要な規格・認証に準拠しています。詳細は sales@rugstorm.com までお問い合わせください。
	・ DB9 RS-232 x 2		
	・ HDMI x 1		
	・ DP + HDMI x 1		
	・ RJ45 x 2		
	・ 5.5mm DC_IN x 1		
	・ 3.5mm Audio x 1		

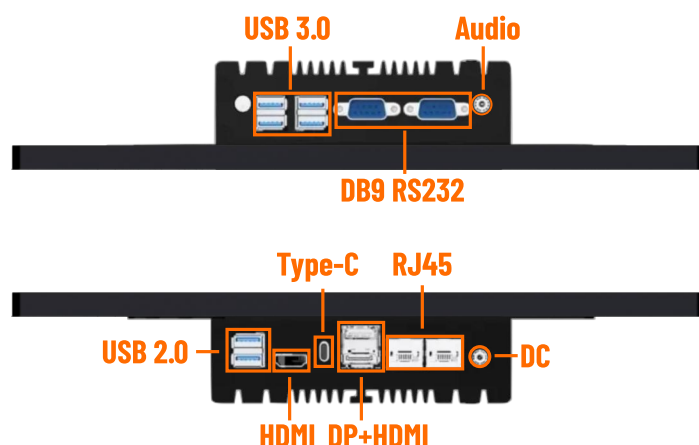

RUGSTORM

*製品の仕様は予告なく変更することがあります。最新版は公式サイト (www.rugstorm.com) または sales@rugstorm.com にてご確認ください。
 *Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com