RUGSTORM

Search RUGSTORM

# Stainless Panel PC D156WP

## 15.6-inch Stainless Panel PC – Windows® / Linux

RUGSTORM Stainless Panel PC D156WP is a 15.6-inch stainless panel PC for wash-down lines in food and pharmaceutical work. It runs Windows® 10 or Linux on an Intel® Celeron® J6412, with an Intel® Core™ i5-1235U optional. The panel is 1920 × 1080, capacitive, at 350 cd/m² typical. Housing is stainless steel with a full-glass front. I/O is on M12 connectors. It is built to the IP69K protection level. Supply 12–24 V. Operating temperature is 0 °C to 50 °C.




- Extended Temp. Resistance
  Humidity Resistance
- Capacitive Touch Panel
  Multi-touch
- Full-Glass Front
  Stainless Housing
- IP69K Ingress Protection
  Water & Dust Resistance
- Seamless Connectivity
  M12 I/O Ports
- Tailored Specifications
  Customisation Available




RUGSTORM
Reliable Devices Built to Make Work Easier

**China Office**
NO.599 Gaojing Road, Shanghai, China

**Japan Office**
7-7-24 Shinjuku, Tokyo, Japan

**Website**
www.rugstorm.com

**Netherland Office**
Baltesakker 17, Eindhoven, Netherlands


**After Sales**
3-30-8 Higashi, Kunitachi, Japan

**E-mail**
sales@rugstorm.com


# RUGSTORM | Stainless Panel PC D156WP

| | |
|---|---|
| OS | Windows® 10 / Linux |
| CPU | Intel® Celeron® J6412 /<br>Intel® Core™ i5-1235U (optional) |
| Memory | 1 x DDR4-3200 SO-DIMM slot, up to 32 GB |
| Storage | J6412: 1 x M.2 2242 B-Key SSD (SATA 3.0)<br>i5-1235U: 1 x M.2 2280 M-Key SSD (SATA 3.0) |
| Display | 15.6-inch<br>1920 x 1080 resolution |
| | Multi-touch capacitive touch screen |
| | Max Brightness: 350 cd/m² |
| | Contrast Ratio: 800:1 |
| | Backlight Life：50,000h |
| Interface | · USB 2.0 x 2 (1 x USB, 1 x M12)<br>· GbE x 2 (M12)<br>· RS-232 x 2 (M12; COM1 RS-485 optional)<br>· DC IN x 1 |

| | |
|---|---|
| Dimension | 398mm (L) 256mm (W) 72.5mm (D) |
| | 6.35kg |
| Power | Input：DC 12~24V |
| Wireless Connectivity | Wi-Fi 2.4GHz & 5GHz |
| | NFC 13.56 MHz |
| Environmental Resistance | Operating Temperature：0°C ~50°C |
| | Storage Temperature：-20°C ~ 60°C |
| | Operating Humidity：5%–95% @ 40°C (non-condensing) |
| | Waterproof: IP69K |
| | EMC: CE/FCC Class B |
| | Vibration: 1.5 Grms (IEC 60068-2-64) |
| | Shock: 10 G / 11 ms (IEC 60068-2-27) |
| Compliance | This product meets major global standards and holds relevant certifications.<br>For details, please email sales@rugstorm.com. |

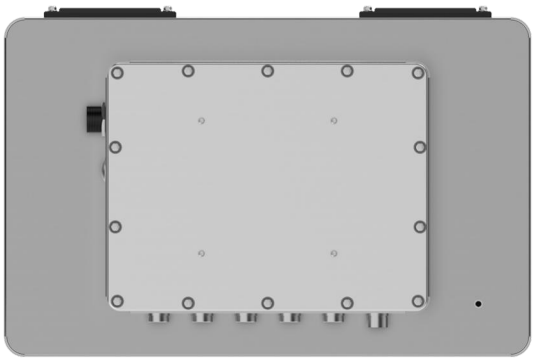

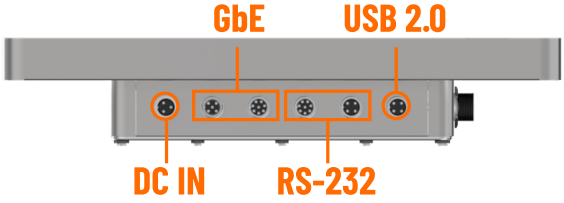


*RUGSTORM holds a wide range of certifications across multiple countries, For more information, please contact us at sales@rugstorm.com
*Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

Quick Inquiry
WhatsApp

RUGSTORM
Reliable Devices Built to Make Work Easier

China Office
NO.599 Gaojing Road, Shanghai, China

Japan Office
7-7-24 Shinjuku, Tokyo, Japan

Website
www.rugstorm.com

Netherland Office
Baltesakker 17, Eindhoven, Netherlands

After Sales
3-30-8 Higashi, Kunitachi, Japan

E-mail
sales@rugstorm.com