RUGSTORM

Search RUGSTORM

Stainless Panel PC D215WP

21.5-inch Stainless Panel PC – Windows® / Linux

RUGSTORM Stainless Panel PC D215WP is a 21.5-inch stainless panel PC for a wash-down station that needs a wider view. It runs Windows® 10 or Linux on an Intel® Celeron® J6412, with an Intel® Core™ i5-1235U optional. The panel is 1920 × 1080, capacitive, at 250 cd/m² typical. Housing is stainless steel with a full-glass front. I/O is on M12 connectors. It is built to the IP69K protection level. Supply 12–24 V. Operating temperature is 0 °C to 50 °C.



- Extended Temp. Resistance
  Humidity Resistance
- Capacitive Touch Panel
  Multi-touch
- Full-Glass Front
  Stainless Housing
- IP69K Ingress Protection
  Water & Dust Resistance
- Seamless Connectivity
  M12 I/O Ports
- Tailored Specifications
  Customisation Available



RUGSTORM
Reliable Devices Built to Make Work Easier

China Office
NO.599 Gaojing Road, Shanghai, China

Japan Office
7-7-24 Shinjuku, Tokyo, Japan

Website
www.rugstorm.com

Netherland Office
Baltesakker 17, Eindhoven, Netherlands


After Sales
3-30-8 Higashi, Kunitachi, Japan

E-mail
sales@rugstorm.com


RUGSTORM | Stainless Panel PC D215WP

OS	Windows® 10 / Linux
CPU	Intel® Celeron® J6412 / Intel® Core™ i5-1235U (optional)
Memory	1 x DDR4-3200 SO-DIMM slot, up to 32 GB
Storage	J6412: 1 x M.2 2242 B-Key SSD (SATA 3.0) i5-1235U: 1 x M.2 2280 M-Key SSD (SATA 3.0)
Display	21.5-inch 1920 x 1080 resolution
	Multi-touch capacitive touch screen
	Max Brightness: 250 cd/m²
	Contrast Ratio: 1000:1
	Backlight Life：50,000h
Interface	· USB 2.0 x 2 (1 x USB, 1 x M12) · GbE x 2 (M12) · RS-232 x 2 (M12; COM1 RS-485 optional) · DC IN x 1

Dimension	53.5mm (L) 330mm (W) 80mm (D)
	8.5kg
Power	Input：DC 12~24V
Wireless Connectivity	Wi-Fi 2.4GHz & 5GHz
	NFC 13.56 MHz
Environmental Resistance	Operating Temperature：0°C ~50°C
	Storage Temperature：-20°C ~ 60°C
	Operating Humidity：5%–95% @ 40°C (non-condensing)
	Waterproof: IP69K
	EMC: CE/FCC Class B
	Vibration: 1.5 Grms (IEC 60068-2-64)
	Shock: 10 G / 11 ms (IEC 60068-2-27)
Compliance	This product meets major global standards and holds relevant certifications. For details, please email sales@rugstorm.com.

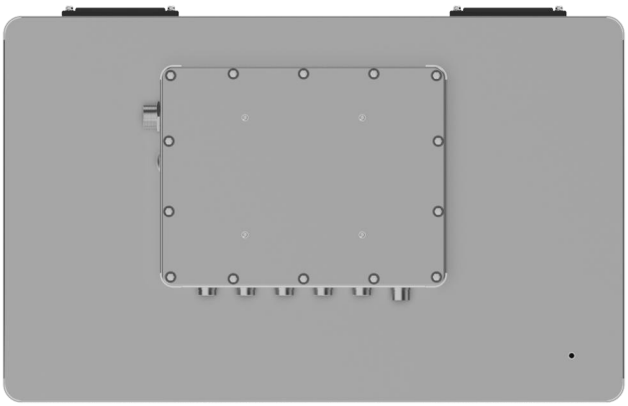



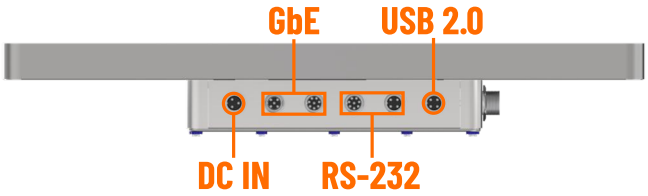

*RUGSTORM holds a wide range of certifications across multiple countries, For more information, please contact us at sales@rugstorm.com
*Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

Quick Inquiry
WhatsApp

RUGSTORM
Reliable Devices Built to Make Work Easier

China Office
NO.599 Gaojing Road, Shanghai, China

Japan Office
7-7-24 Shinjuku, Tokyo, Japan

Website
www.rugstorm.com

Netherland Office
Baltesakker 17, Eindhoven, Netherlands

After Sales
3-30-8 Higashi, Kunitachi, Japan

E-mail
sales@rugstorm.com