
RUGSTORM | Touch Panel PC D101WN

Revision: D101WNE261030

OS	Windows® 10 LTSC / Windows® 11
CPU	Intel® N100, 3.4 GHz (Max)
Display	10.1-inch 1280 x 800 resolution
	5-point capacitive touch screen
	Max Brightness: 300 cd/m²
	Contrast Ratio: 1000:1
	Viewing Angel: 170°
	Response Time : 30ms
	Backlight Life : 30,000h
Interface	· USB-C x 1 · USB 3.0 x 4 · USB 2.0 x 2 · DB9 RS-232 x 2 · HDMI x 1 · DP + HDMI x 1 · RJ45 x 2 · 5.5mm DC_IN x 1 · 3.5mm Audio x 1

Memory	4GB DDR4 / 16GB DDR4
Storage	128GB / 256GB / 512GB / 1TB
Dimension	252mm (L) 171mm (W) 49.5mm (D)
	1.6kg
Power	Input : 12V
Wireless Connectivity	Wi-Fi 2.4GHz & 5GHz (optional)
	Bluetooth® v5.4 (optional)
Environmental Resistance	Operating Temperature : -10°C ~55°C
	Storage Temperature : -20°C ~ 60°C
	Operating Humidity : 5%~95% (non-condensing)
	Front Panel Sealing : IP54 / IP65 (optional)
	Surface Hardness : 6H
Compliance	This product meets major global standards and holds relevant certifications. For details, please email sales@rugstorm.com.



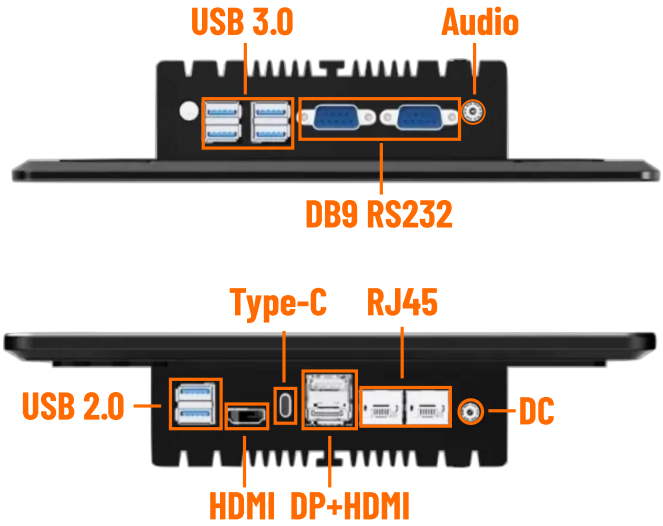

*RUGSTORM holds a wide range of certifications across multiple countries, For more information, please contact us at sales@rugstorm.com
*Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

Quick Inquiry
WhatsApp

RUGSTORM
Reliable Devices Built to Make Work Easier

China Office
NO.599 Gaojing Road, Shanghai, China

Japan Office
7-7-24 Shinjuku, Tokyo, Japan

Website
www.rugstorm.com

Netherland Office
Baltesakker 17, Eindhoven, Netherlands

After Sales
3-30-8 Higashi, Kunitachi, Japan

E-mail
sales@rugstorm.com


RUGSTORM | Touch Panel PC D156WN

Revision: D156WNE261030

OS	Windows® 10 LTSC / Windows® 11
CPU	Intel® N100, 3.4 GHz (Max)
Display	15.6-inch 1920 x 1080 resolution
	5-point capacitive touch screen
	Max Brightness: 300 cd/m²
	Contrast Ratio: 1000:1
	Viewing Angel: 170°
	Response Time：30ms
	Backlight Life：30,000h
Interface	· USB-C x 1 · USB 3.0 x 4 · USB 2.0 x 2 · DB9 RS-232 x 2 · HDMI x 1 · DP + HDMI x 1 · RJ45 x 2 · 5.5mm DC_IN x 1 · 3.5mm Audio x 1

Memory	4GB DDR4 / 16GB DDR4
Storage	128GB / 256GB / 512GB / 1TB
Dimension	384.2mm (L) 244mm (W) 50.5mm (D)
	2.4kg
Power	Input：12V
Wireless Connectivity	Wi-Fi 2.4GHz & 5GHz (optional)
	Bluetooth® v5.4 (optional)
Environmental Resistance	Operating Temperature：-10°C ~55°C
	Storage Temperature：-20°C ~ 60°C
	Operating Humidity：5%~95% (non-condensing)
	Front Panel Sealing：IP54 / IP65 (optional)
	Surface Hardness：6H
Compliance	This product meets major global standards and holds relevant certifications. For details, please email sales@rugstorm.com.



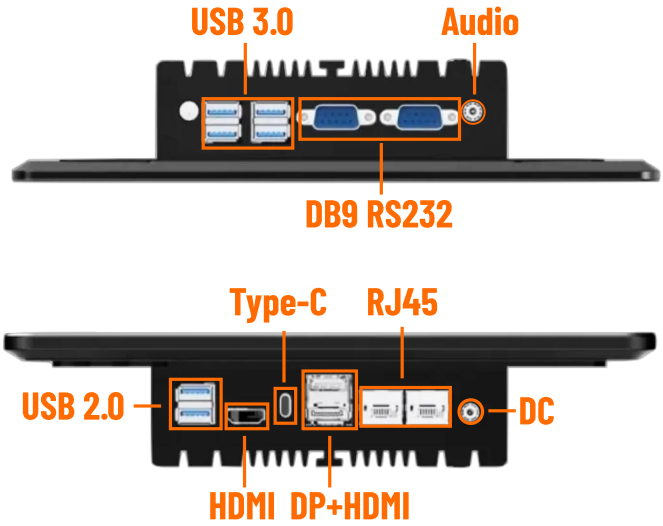

*RUGSTORM holds a wide range of certifications across multiple countries, For more information, please contact us at sales@rugstorm.com
*Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

Quick Inquiry
WhatsApp

RUGSTORM
Reliable Devices Built to Make Work Easier

China Office
NO.599 Gaojing Road, Shanghai, China

Japan Office
7-7-24 Shinjuku, Tokyo, Japan

Website
www.rugstorm.com

Netherland Office
Baltesakker 17, Eindhoven, Netherlands

After Sales
3-30-8 Higashi, Kunitachi, Japan

E-mail
sales@rugstorm.com


RUGSTORM | Touch Panel PC D215WN

Revision: D215WNE261030

OS	Windows® 10 LTSC / Windows® 11
CPU	Intel® N100, 3.4 GHz (Max)
Display	21.5-inch 1920 x 1080 resolution
	10-point capacitive touch screen
	Max Brightness: 350 cd/m²
	Contrast Ratio: 1000:1
	Viewing Angel: 178°
	Response Time：30ms
	Backlight Life：30,000h
Interface	· USB-C x 1 · USB 3.0 x 4 · USB 2.0 x 2 · DB9 RS-232 x 2 · HDMI x 1 · DP + HDMI x 1 · RJ45 x 2 · 5.5mm DC_IN x 1 · 3.5mm Audio x 1

Memory	4GB DDR4 / 16GB DDR4
Storage	128GB / 256GB / 512GB / 1TB
Dimension	546mm (L) 342mm (W) 57mm (D)
	5.3kg
Power	Input：12V
Wireless Connectivity	Wi-Fi 2.4GHz & 5GHz (optional)
	Bluetooth® v5.4 (optional)
Environmental Resistance	Operating Temperature：-10°C ~55°C
	Storage Temperature：-20°C ~ 60°C
	Operating Humidity：5%~95% (non-condensing)
	Front Panel Sealing：IP54 / IP65 (optional)
	Surface Hardness：6H
Compliance	This product meets major global standards and holds relevant certifications. For details, please email sales@rugstorm.com.



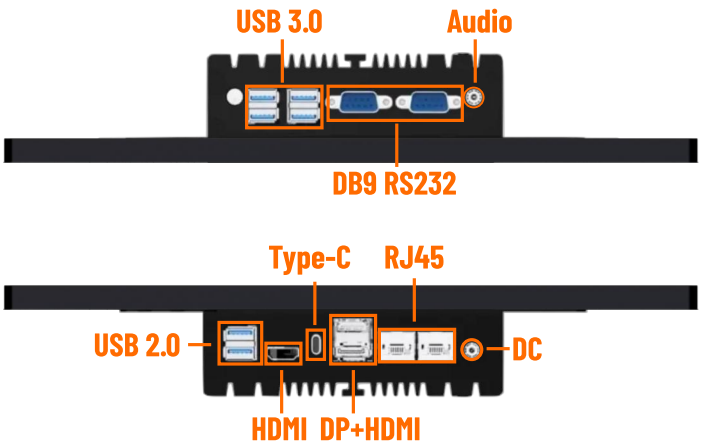

Quick Inquiry

WhatsApp

*RUGSTORM holds a wide range of certifications across multiple countries, For more information, please contact us at sales@rugstorm.com

*Specifications are subject to change without notice. For the latest updates, please visit www.rugstorm.com or contact us at sales@rugstorm.com

RUGSTORM
Reliable Devices Built to Make Work Easier

China Office
NO.599 Gaojing Road, Shanghai, China

Japan Office
7-7-24 Shinjuku, Tokyo, Japan

Website
www.rugstorm.com

Netherland Office
Baltesakker 17, Eindhoven, Netherlands

After Sales
3-30-8 Higashi, Kunitachi, Japan

E-mail
sales@rugstorm.com